

VALENA™ LIFE

THE EVOLUTION
THAT TRANSFORMS
YOUR DAILY LIFE



CATALOGUE
PAGES
INSIDE
→

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand®**



VALENA LIFE

The evolution
that transform
your daily life

Drawing from decades of know-how, Legrand's Valena Life range is at once timeless and transformative.

With the Valena Life range of products and finishes, you can meet the requirements of all your customers.

INDEX

1. INTRODUCTIONS

- Valena Life Innovation is in progress	2
- Valena Life Design	4
- Valena Life freedom of choice	6
- Valena Life The perfect solution wherever	14

2. IN'MATIC: NEW MECHANISM AND INSTALLATION ADVANTAGES

16

3. TECHONOLGY

- Energy distribution	20
- Switches	22
- Lighting controls	24
- Radio controls	26
- Multimedia solutions	30
- Comfort in every situation	32
- Waterproofness and safety	34
- Valena MyHOME automation	36
- Technology and flexibility in the office	40
- Hotel room management	42


4. CATALOGUE

44



Valena Life Innovation is in progress

With Valena, Legrand designs
new electromechanical and electronic
solutions for more and more state
of the art systems.

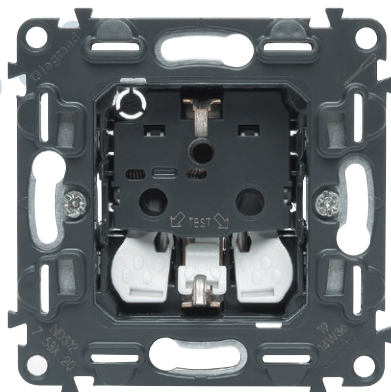


Valena IN'MATIC mechanism

- Safe
- Reliable
- Performing



New functions


- Comfort
- Communication
- Security
- Wireless

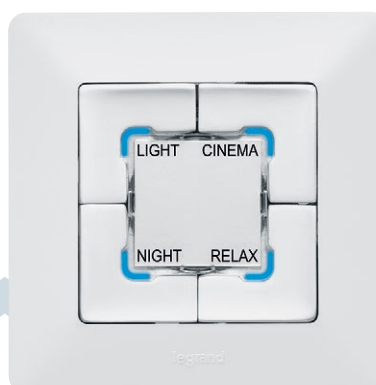

MyHOME

Automation system


square within
a square
rationalism
contemporary
delicacy
neutrality

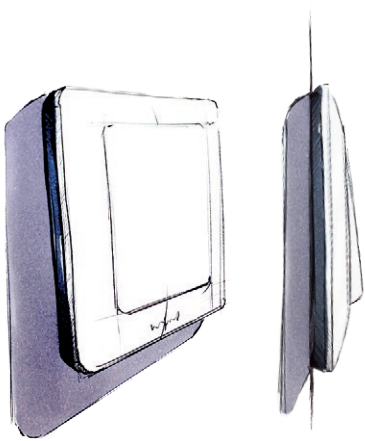

Design

The importance of details

VALENA LIFE renews itself maintaining its sophisticated style and multiplying innovative solutions. The contemporary design of the new line mirrors actual trends: the square within a square is so delicate in shape and rational in application to satisfy different needs and to easily fit any context.

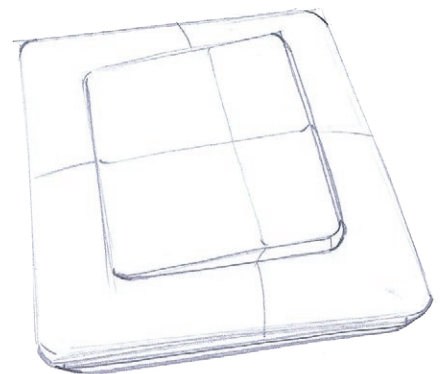



Lightness at the service of your touch

The modern concave rocker.

The light side of slimness


The back creates
the impression that the product
is floating on the wall.



Freedom of choice

The wide range
of cover plate finishes
and colours meets
aesthetic taste and
suits any kind of
interior design.



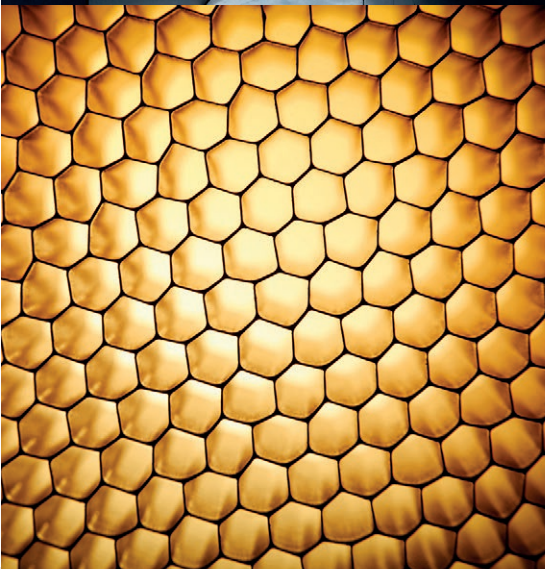

Freedom of choice

Timelessly Classic

Simple. Subtle.
Finishes that will blend in seamlessly
in your environment



WHITE



Freedom of choice

Boldy Expressive

Be daring.

Creative prints and vibrant colors add another dimension to your life.

See where your imagination takes you



LINK



Freedom of choice

Truly Contemporary

A modern and refined collection that expertly blends the natural with the industrial, from bold to understated – and everything in between



COPPER STYLE





Valena Life

The perfect solution wherever

The wide range of proposals meets any expectation,
and fits with elegance and simplicity in any room
of the residential and tertiary sectors.




More than 150 functions
to fit with elegance and
simplicity everywhere.

innovation



2P+E /USB MIXED SOCKET:
SAVE SPACE

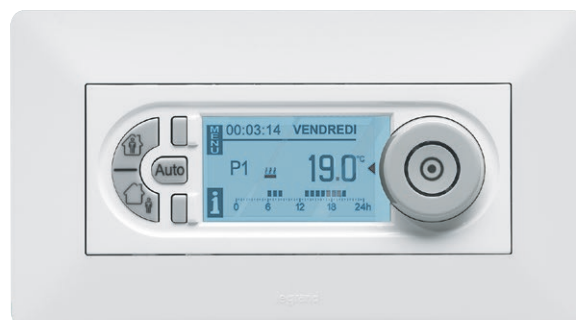

PROGRAMMABLE THERMOSTAT



SWITCHES



DIMMERS



ENERGY-SAVING SWITCHES



SOCKET OUTLETS



HDMI



USB CHARGERS

Valena

IN'MATIC

Safe Reliable Robust

PROTECTED CONTACTS IP2X MECHANISM

No finger contacts with live parts during installation

BIGGER RELEASE BUTTONS

More comfort to release the cable from automatic terminals

ISOLATED FRAME


Protection against electrical shock and injuries

SHUTTER FOR CHILD PROTECTION

embedded in the mechanism


TEST POINT

Free access without removing the device from the box

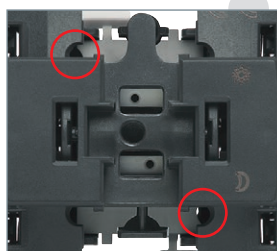

Detail from one-way switch

Double teeth claw system



- 1 - More effective grip and better tear resistance
- 2 - Completely protected claws at the neutral position, to avoid damage to the wires and injuries of the hand during installation
- 3 - Fast and automatically return to the neutral position

IN'MATIC : better performance and maximum quality for sockets and controls



Automatic terminals with coloured cable entry



Fast and toolless: just a few seconds needed to wire the device.

Reliable: longlasting connexion guaranteed.

Taping off: faster and easier than with a screw terminal.

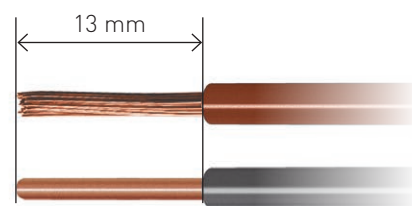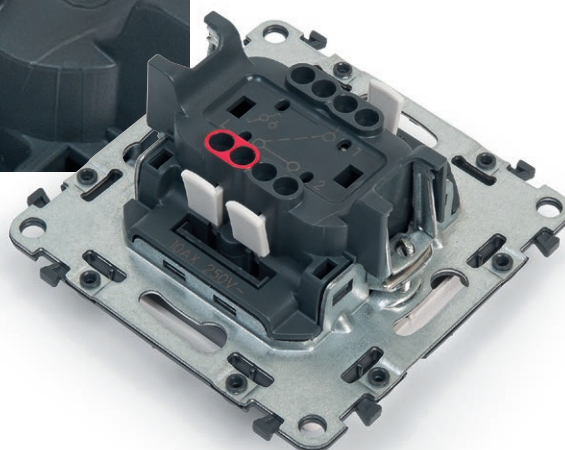

Suitable for both rigid and flexible cable.

Protection cover



High protection of the device against dust, paint and scratches, even after installation. No need to remove the protection when the product is used before the cover plate installation.

LED Plug-in




Illuminated functions with LED technology: energy saving, longlasting solution.



Valena IN'MATIC

Simple and Faster

The careful design of each component allows the installer to rely on a quick assembly, smoothly and reliable over time.

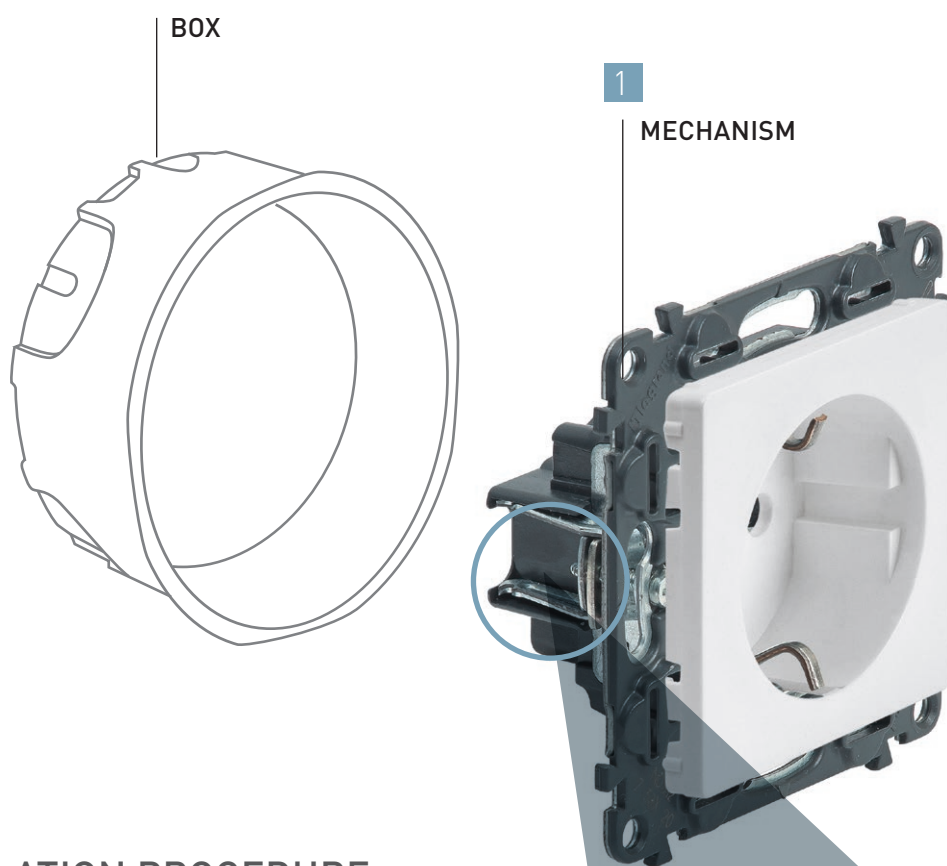


INSTALLATION PROCEDURE

- 1** Fix the device into the box
- 2** Complete the work by clipping the plate (the screwless cover plate guides you in this process)



Innovative docking system for multi-gang installation

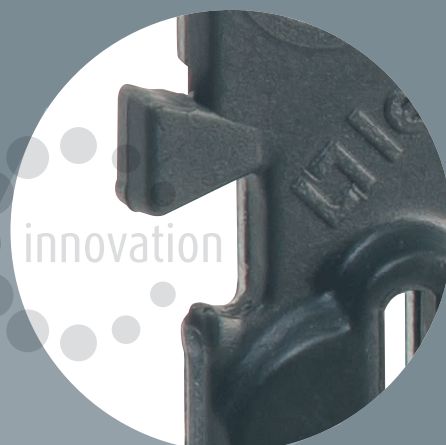

2


PLATE



Visual quality of the final seal:
perfect alignment of all plates in the covers.

Thanks to an innovative docking system, the support frames can be perfectly and easily joined for multi-gang installation.

The new system guarantees the stability and solidity of the devices during assembly: installation of the plastic cover of the mechanism and the cover plate.

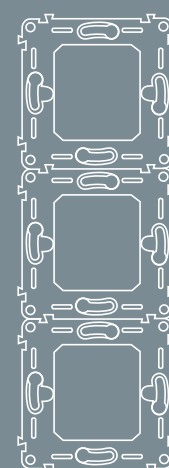

Perfect for installations with both horizontal and vertical orientation

Switches

A complete offer
for residential
and commercial
applications

A broad range
of solutions to meet
all your customer
needs.




Available in 10AX and 16AX.



**TWO WAY
INDICATOR SWITCH**



**ILLUMINATED TWO GANG
TWO-WAY SWITCH**

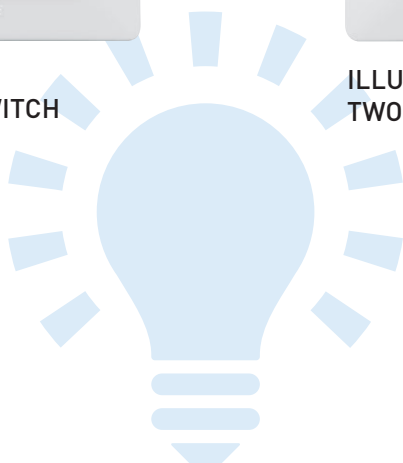

Plug-in LED for luminous functions

Led technology ensures
high reliability, long life
and energy saving

IP44 PROTECTION

A complete weatherproof range
whenever an IP 44 protection index is required.



**LIGHTING
CONTROL**



**MOTION
SENSOR**



IP44 PLATE

To make all the
In'matic mechanisms IP44

Lighting controls

A complete range
for every kind
of lamp

Different solutions
for your comfort, safety,
and energy saving.



ENERGY SAVING SWITCH

Is the perfect solution for a child's room, cellar, corridor, etc.

The light is switched on by the user and goes off automatically when no one is in the room

New dimmers: for an efficient management of all types of load



PUSH DIMMER

2-wire universal dimmer to control and adjust all types of load, LED and CFL included.



1000W DIMMER WITH 5 STATUS LED

Can be associated with push-buttons. Memorises previous light level used.

Illumination only when needed




MOTION SENSOR

To manage lighting without waste in the residential and tertiary sectors.



SKIRTING LIGHT WITH MOTION SENSOR

Light up the path automatically when somebody is passing.

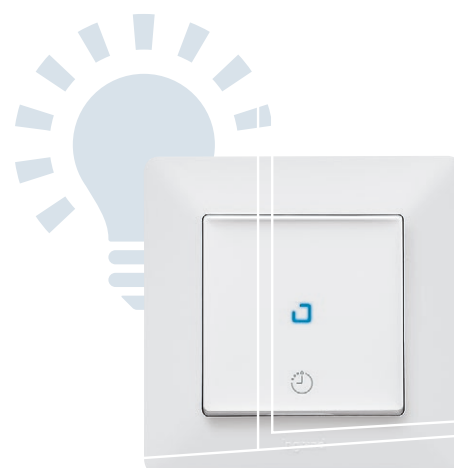

TIMER SWITCH

Light off after programmable delay.

Multimedia solutions


All connections
at your fingertips

An easy, flexible
and High-quality offer.



BLUETOOTH MODULE

The Bluetooth module lets you
play your smart phone's music,
directly in your house

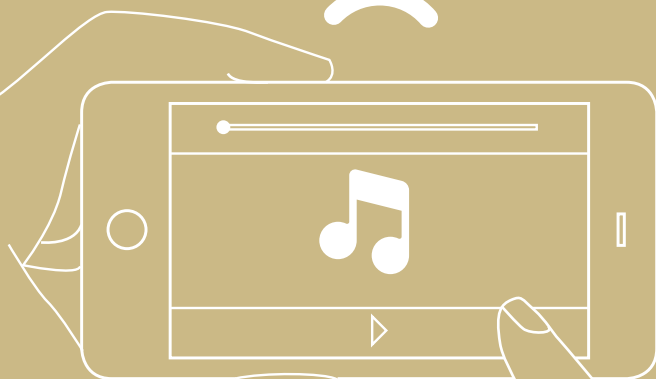



DATA, TV AND AUDIO/VIDEO CONNECTIONS

AUDIO/VIDEO SOCKETS

CONNECTION, ENTERTAINMENT, AND MULTIMEDIA

A complete range of products dedicated to audio/video connections provides the desired level of entertainment, relax and functionality.



TRIPLE RCA SOCKET



RJ 11 + RJ 45 SOCKET



HDMI 1.3



HD 15 + 3.5 mm JACK



TV-R-SAT SOCKET


SOUND DIFFUSION SYSTEM

From the 'one room' solution, to the multi-area complete solution.



ONE AREA SOUND DIFFUSION

Easy to install, full integration inside the wall.
Tuner
Tuner + display



BLUETOOTH MODULE

The Bluetooth module lets you play your smart phone's music, directly in your house



LOUDSPEAKER

A wide choice (flush, false ceiling, invisible one)

ValenaTM

MyHOME[®] automation

Thanks to a wide range of devices, MyHOME offers simple and efficient solutions to meet the safety, comfort, energy and communication needs of any private home and service sector establishment. Thanks to intelligent and programmable electronic devices, MyHOME makes it possible to access, in a simple and customised way, advanced functions that would

be difficult in a traditional electric system.

In addition, its installation modularity and the functional integration of the various devices offer freedom to decide which applications to install immediately, and which in the future, without the need for important structural updates, and with highly effective cost management.


MyHOME can also be integrated with other systems, such as KNX and DALI. Using the appropriate interface, and the TCP/IP protocol, MyHOME is capable of managing and supervising the home also remotely, using a fixed telephone line, a mobile phone, or an internet connection.



MYHOME_SCREEN10

Thanks to the 10" 16/9 touch screen, users can manage and control the electric system, the multimedia functions (photos, audio, video), and the Internet connection.

POWER SUPPLY

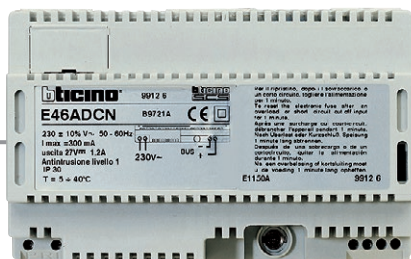

Functions

COMFORT

- Light automation
- Management of shutters and automations
- Scenario activation

THERMOSTAT



LIGHT AND SHUTTER CONTROL



2 WIRE BUS



SCENARIO CONTROL



LIGHT CONTROL



8-KEY CONTROL





NEW RJ45 TOOLLESS
CONNECTORS



USB CHARGER

Technology and flexibility in the office

“Nomadic” working practices and the constant desire to optimize productivity are influencing the way in which office buildings are designed.

An infrastructure is therefore needed for flexible installation of electrical equipment and communication networks at the desired point.



Flush workstation for commercial buildings

Make the most of the 200 Mosaic functions with Valena Life aesthetics for a functional and compact workstation solution.

SPECIAL 8 MODULE AND 2x8 MODULE SUPPORTS

With Valena Life plate available in white and aluminium versions.



1000W DIMMER

For commercial buildings, with 5 status LED.

Automation system



The Valena offer includes devices which conform to the international standard KNX, which is the most widely used technology for the intelligent management of buildings.

MAIN APPLICATIONS:

- Lighting control
- Shutter/slat controls



CONTROL KNX

With aesthetic lighting

Hotel room management

A complete offer for
a state of the art
electric system in the
hotel room as well

The Legrand Hotel range has been
designed for a pleasant hotel stay,
making guests feel as if they were in
their own homes.



"DO NOT DISTURB - MAKE UP ROOM"
LAMP WITH DIFFUSER, DOORBELL AND
READER FOR ACCESS CONTROL FUNCTION



INSIDE THE ROOM:
"DO NOT DISTURB -
MAKE UP THE ROOM"
PUSHBUTTONS,
AND KEY CARD SWITCH

Immediately at ease

The presence of a key card
switch invites the guest
to immediately interact with
the room services on offer.
To be left undisturbed
simply press the "do not
disturb" control.

Connection, entertainment, and multimediality

A range of products dedicated to audio/video connections provides the desired level of entertainment and relax.



USB CHARGER



HDMI CONNECTOR

To manage readers and electronic devices such as DVDs, digital cameras and MP3 readers



MyHOME DIGITAL THERMOSTAT



MyHOME 8-KEY CONTROL

The right atmosphere, in one move

Thanks to the new MyHOME device control with the 8 keys (customisable) and digital thermostat installed at the side of the bed, you can recreate with a single touch the desired atmosphere, adjusting the light, the temperature, and the shutters.



Extra attention to safety

Skirting light with motion sensor for the night, alarm pull cords and sockets to ensure maximum safety at all times.



Supervision software

To control the status of the rooms with the corresponding notifications, and manage the available functions. It also performs functions connected with the programming of the keycards.

2 TYPES OF SOFTWARE AVAILABLE:

- Management of up to 20 rooms or common areas
- Management of over 20 rooms or common areas





7 521 01 + 7 540 31



7 522 06 + 7 541 11



7 522 65 + 7 541 21



7 521 10 + 7 540 71



7 521 08 + 7 540 91

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
After clipping in the rocker, all LED lamps light up blue.
Flowpack packaging: robust protection to ensure optimum operation.

Pack Cat. Nos Switches 10 AX - 250 V~

Pack	Cat. Nos	Switches 10 AX - 250 V~
		One-way switch
		Automatic terminals
15	7 521 01	White Valena Life
15	7 522 01	Ivory Valena Life
15	7 523 01	Aluminium Valena Life
		Two-way switch
		Automatic terminals
15	7 521 06	White Valena Life
15	7 522 06	Ivory Valena Life
15	7 523 06	Aluminium Valena Life
		Intermediate switch
		Screw terminals
5	7 521 07	White Valena Life
5	7 522 07	Ivory Valena Life
5	7 523 07	Aluminium Valena Life
		2-gang one-way switch
		Automatic terminals
15	7 521 05	White Valena Life
15	7 522 05	Ivory Valena Life
15	7 523 05	Aluminium Valena Life
		2-gang two-way switch
		Automatic terminals
15	7 521 08	White Valena Life
15	7 522 08	Ivory Valena Life
15	7 523 08	Aluminium Valena Life
		Energy saving switch
		Automatic terminals
		Installed and works like a conventional switch/2-way switch. But in addition, it switches off automatically after 10 minutes if no movement is detected by the built-in IR detector cell. Detection field 160°. Detection range 8 m Compatible with any lamp - 12-150 W: incandescent and 230 V halogen - 12-150 VA: lamps with ferromagnetic or electronic ballast - 8-30 W (or 650 mA): LED and CFL All types of lamp can be mixed on the same circuit. Ideal for rooms where the light may be left switched on needlessly (child's bedroom, box room).
1	7 521 65	White Valena Life
1	7 522 65	Ivory Valena Life
1	7 523 65	Aluminium Valena Life

Pack Cat. Nos Switches 10 AX - 250 V~ (continued)

Pack	Cat. Nos	Switches 10 AX - 250 V~ (continued)
		Illuminated one-way switch
		Equipped with low consumption LED 0.15 mA
5	7 521 10	White Valena Life
5	7 522 10	Ivory Valena Life
5	7 523 10	Aluminium Valena Life
		One-way indicator switch
		Automatic terminals
		Equipped with 3 mA low consumption LED
5	7 521 04	White Valena Life
5	7 522 04	Ivory Valena Life
5	7 523 04	Aluminium Valena Life
		Illuminated two-way switch
		Automatic terminals
		Equipped with 0.15 mA low consumption LED
5	7 521 26	White Valena Life
5	7 522 26	Ivory Valena Life
5	7 523 26	Aluminium Valena Life
		Illuminated intermediate switch
		Screw terminals
		Equipped with 0.15 mA low consumption LED
5	7 521 48	White Valena Life
5	7 522 48	Ivory Valena Life
5	7 523 48	Aluminium Valena Life
		Pull cord two-way switch
		Automatic terminals
		Possible accessory: Cat. No. 0 898 05 pull cord 1.5 m
1	7 521 23	White Valena Life
1	7 522 23	Ivory Valena Life
1	7 523 23	Aluminium Valena Life

Valena™ Life

switches with cover plate



Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
After clipping in the rocker, all LED lamps light up blue.
Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Switches 10 AX - 250 V~ (continued)
		Illuminated 2-gang one-way switch Automatic terminals Equipped with 2 x 0.15 mA low consumption LED
5	7 521 28	White Valena Life
5	7 522 28	Ivory Valena Life
5	7 523 28	Aluminium Valena Life
		Illuminated 2-gang two-way switch Automatic terminals Equipped with 2 x 0.15 mA low consumption LED
5	7 521 09	White Valena Life
5	7 522 09	Ivory Valena Life
5	7 523 09	Aluminium Valena Life
		3-gang one-way switch Screw terminals
1	7 521 03	White Valena Life
1	7 522 03	Ivory Valena Life
1	7 523 03	Aluminium Valena Life
		Switches 16 AX - 250 V~ Double pole switch Screw terminals
5	7 521 02	White Valena Life
5	7 522 02	Ivory Valena Life
5	7 523 02	Aluminium Valena Life

Valena™ Life

push-buttons with cover plate

2016



Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
After clipping in the rocker, all LED lamps light up blue.
Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Push-buttons 6 A - 250 V~
		Changeover push-button Automatic terminals
15	7 521 11	White Valena Life
15	7 522 11	Ivory Valena Life
15	7 523 11	Aluminium Valena Life
		Changeover push-button, bell symbol Automatic terminals
5	7 521 15	White Valena Life
5	7 522 15	Ivory Valena Life
5	7 523 15	Aluminium Valena Life
		Pull-cord changeover push-button Automatic terminals
1	7 521 24	White Valena Life
1	7 522 24	Ivory Valena Life
1	7 523 24	Aluminium Valena Life
		Illuminated changeover push-button Automatic terminals Equipped with 0.15 mA low consumption LED
5	7 521 12	White Valena Life
5	7 522 12	Ivory Valena Life
5	7 523 12	Aluminium Valena Life
		Illuminated changeover push-button, bell Automatic terminals Equipped with 0.15 mA low consumption LED
5	7 521 16	White Valena Life
5	7 522 16	Ivory Valena Life
5	7 523 16	Aluminium Valena Life
		Illuminated label-holder push-button Automatic terminals Equipped with 0.15 mA Low consumption LED Equipped with transparent rocker with 3 different coloured inserts (white, ivory, aluminium)
5	7 521 14	White, Ivory, Aluminium Valena Life
		2-gang changeover push-button Automatic terminals
5	7 521 18	White Valena Life
5	7 522 18	Ivory Valena Life
5	7 523 18	Aluminium Valena Life
		Illuminated push-button 12 V Automatic terminals Equipped with low consumption LED
5	7 521 13	White Valena Life
5	7 522 13	Ivory Valena Life
5	7 523 13	Aluminium Valena Life

Valena™ Life

dimmers with cover plate



7 521 60 + 7 540 01



7 523 62 + 7 541 31







7 521 63 + 7 540 06

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.

Supplied with mounted dust protection transparent shield.

Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Dimmers 230 V~ - 50 Hz
		Equipped with overvoltage and short-circuit protection. When switched on, light up at the level set before last switch-off Can be remotely controlled via non-illuminated push-buttons (Cat. No. 7 520 11), with each push-button able to perform the ON/OFF and dimming function
		Rotary dimmer without neutral For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max.) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max.) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA - fluorescent tube - ballast: 5 VA to 300 VA - halogen and incandescent 230 V~: 5 W to 300 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off
1	7 521 60	 <input type="checkbox"/> White Valena Life
1	7 522 60	<input type="checkbox"/> Ivory Valena Life
1	7 523 60	<input type="checkbox"/> Aluminium Valena Life
		Push-dimmer without neutral For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max.) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max.) - halogen with ferromagnetic or electronic transformer: 3 VA to 400 VA - fluorescent tube - ballast: 3 VA to 200 VA - halogen and incandescent 230 V: 3 W to 400 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off Functioning: - dimming mode - pre-set level mode (0%, 33%, 66% and 100%) - nightlight mode: dimming of the lamp for 1 hour
1	7 521 62	 <input type="checkbox"/> White Valena Life
1	7 522 62	<input type="checkbox"/> Ivory Valena Life
1	7 523 62	<input type="checkbox"/> Aluminium Valena Life
		Dimmer, with neutral, for 1-10 V ballast Rocker 7 548 90 (white) 91 (ivory) and 92 (aluminium) not included
1	7 520 67	 Screw terminals For fluorescent lamps with 1-10 V ballast: 600 VA
		1000 W dimmer, with neutral Mechanism supplied with cover plate Screw terminals For the following kinds of lamps: - halogen with ferromagnetic or electronic transformer: 100 VA to 100 VA - halogen and incandescent 230 V: 100 W to 1000 W When switched on, gradually (2 seconds) lights up at the level set before last switch-off 5 LEDs displaying the current level of the circuit Complete with 5-module cover Supplied with with Cat. No. 0 801 02 Batibox multimaterial 2-gang box (depth 40 mm). Supplied with cover plate.
1	7 521 63	 <input type="checkbox"/> White Valena Life
1	7 523 63	<input type="checkbox"/> Aluminium Valena life

LEGRAND PACKAGING

2016

Products always PROTECTED

Thanks to the flowpack, the products can be easily identified and remain protected until the installation.



INDIVIDUAL PROTECTION AND QUICK IDENTIFICATION

- products are individually protected and can be hang on or placed in bulk
- the product is always visible for a faster identification

FULL PROTECTION AND ADDITIONAL INFORMATION WITH QR CODE

- the product is protected throughout the delivery process, until the installation
- all useful information is printed on the flow pack
- additional information by scanning the QR code



Valena™ Life

motion sensors, roller blind control with cover plate

2016



7 521 70 + 7 540 71



7 522 70 + 7 541 11



















7 520 25 + 7 551 60 + 7 540 81



7 521 29 + 7 541 21

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Motion sensors
		<p>All sensors are compatible with any type of lamp Detection field 180° Detection range 8 m Integrated self-protection against overloads and short-circuits.</p> <p>Motion sensor without neutral Accepted power by lamp type: - LEDs* 3 W to 100 W - Compact fluorescent* 3 W to 100 W - LEDs, CFLs, Halogen, fluorescent tubes with ferromagnetic or electronic ballast: 3 VA to 250 VA - 230 V halogen, incandescent: 3 W to 250 W * If several sensors are installed on the same circuit, the minimum load increases (see data sheet). Up to 3 sensors can be connected in parallel. Time delay setting from 10 s to 10 min. Light level threshold setting from 5 lux to 1275 lux. Standby consumption: 0.02 W</p>
1	7 521 70	 <input type="checkbox"/> White Valena Life
1	7 522 70	 <input type="checkbox"/> Ivory Valena Life
1	7 523 70	 <input type="checkbox"/> Aluminium Valena Life
		<p>Motion sensor without neutral, with override The sensor can be forced to ON, Automatic or OFF mode using a 3-position slider. Accepted power by lamp type: - LEDs* 3 W to 100 W - Compact fluorescent* 3 W to 100 W - LEDs, CFLs, Halogen, fluorescent tubes with ferromagnetic or electronic ballast: 3 VA to 250 VA - 230 V halogen, incandescent: 3 W to 250 W * If several sensors are installed on the same circuit, the minimum load increases (see data sheet). Up to 3 sensors can be connected in parallel. Possibility of additional remote manual control with push-button. Time delay setting from 10 s to 10 min. Light level threshold setting from 5 lux to 1275 lux. Standby consumption: 0.02 W</p>
1	7 521 72	 <input type="checkbox"/> White Valena Life
1	7 522 72	 <input type="checkbox"/> Ivory Valena Life
1	7 523 72	 <input type="checkbox"/> Aluminium Valena Life
		<p>Motion sensor with neutral Accepted power by lamp type: - LEDs: 0 to 50 W - Compact fluorescent: 0 to 50 W - LEDs, CFLs, Halogen with ferromagnetic or electronic ballast: 0 to 200 VA - Fluorescent tubes with ferromagnetic or electronic ballast: 0 to 150 VA - 230 V halogen, incandescent: 0 to 400 W Only one sensor per circuit. No remote manual control with push-button. Time delay setting from 10 s to 10 min. Light level threshold setting from 5 lux to 1275 lux. Standby consumption: 0.55 W</p>
1	7 521 73	 <input type="checkbox"/> White Valena Life
1	7 522 73	 <input type="checkbox"/> Ivory Valena Life
1	7 523 73	 <input type="checkbox"/> Aluminium Valena Life

Pack	Cat. Nos	Roller blind controls 10 A - 250 V~
		<p>Roller blind switch Automatic terminals For direct control of the motor Roller shutter/awning/canopy control</p>
5	7 521 29	 <input type="checkbox"/> White Valena Life
5	7 522 29	 <input type="checkbox"/> Ivory Valena Life
5	7 523 29	 <input type="checkbox"/> Aluminium Valena Life
		<p>Roller blind push-button Automatic terminals For control via electronic control unit</p>
5	7 521 30	 <input type="checkbox"/> White Valena Life
5	7 522 30	 <input type="checkbox"/> Ivory Valena Life
5	7 523 30	 <input type="checkbox"/> Aluminium Valena Life
		<p>Keycard switches Electronic card-operated switch Rockers 7 551 60 (white) 61 (Ivory) 62 (alluminium) not included</p>
1	7 520 25	 <p>Screw terminals For energizing a circuit by inserting a card Example of use: hotel room power supply only when the guest is present 230 VA - 50/60 Hz Mechanism with 30s time delay after card removal. To be used with the card Cat. no. 0 898 06 Card width max. 54 mm. Card not supplied.</p>

Valena™ IN'MATIC mechanisms

key switches






7 521 25 + 7 540 01



7 522 19 + 7 541 61

Valena In'Matic mechanisms are supplied with metal support, for claw or screw mounting. Mechanisms are supplied with cover plate. Supplied with mounted dust protection transparent shield. Packaged in boxes

Pack	Cat.Nos	Key switch 2 positions
1	7 521 25	 <ul style="list-style-type: none"><input type="checkbox"/> White Valena Life<input type="checkbox"/> Ivory Valena Life<input type="checkbox"/> Aluminium Valena Life
1	7 522 25	
1	7 523 25	
		Key push-button
		3-position key-operated push-button Changeover switch with off position - 10 A - 230 V~ Key can be removed in off position To be equipped with European key barrel Cat.No 0 697 95 (order separately)
1	7 521 19	 <ul style="list-style-type: none"><input type="checkbox"/> White Valena Life<input type="checkbox"/> Ivory Valena Life<input type="checkbox"/> Aluminium Valena Life
1	7 522 19	
1	7 523 19	
		Key switch for emergency lighting
1	7 521 38	 <ul style="list-style-type: none"><input type="checkbox"/> White Valena Life<input type="checkbox"/> Ivory Valena Life<input type="checkbox"/> Aluminium Valena Life
1	7 522 38	
1	7 523 38	

Valena™ IN'MATIC mechanisms

thermostats and ventilation controls







7 521 35 + 7 540 06



7 521 32 + 7 540 31

Valena In'Matic mechanisms are supplied with metal support, for claw or screw mounting. To be equipped with Valena Life cover plates and plates Supplied with mounted dust protection transparent shield Packaged in boxes

Pack	Cat.Nos	Thermostats	
		Electronic room thermostat	
		Screw terminals Control knob with index and adjustable segments for min. and max. settings Adjustable range from 5°C to 30°C (+/- 0.5°C) Power supply: 230 V~ - 50/60 Hz One potential-free changeover contact output Suitable for controlling heated ceilings and underfloor heating - LV use breaking capacity: 8 A - 250 V~ - resistive inductive circuit 2 A - 250 V~ - inductive circuit - ELV use breaking capacity: 12 to 48 VA- 12 to 24 V=, from 1 mA min. to 500 mA max.	
1	7 521 33		<input type="checkbox"/> White Valena Life
1	7 522 33		<input type="checkbox"/> Ivory Valena Life
1	7 523 33		<input type="checkbox"/> Aluminium Valena Life
		Floor heating thermostat	
		Screw terminals With one potential-free N/O contact and LED 16 A - 230 V~ Adjustable range from 10°C to 60°C	
1	7 521 34		<input type="checkbox"/> White Valena Life
1	7 522 34		<input type="checkbox"/> Ivory Valena Life
1	7 523 34		<input type="checkbox"/> Aluminium Valena Life
		Programmable thermostat	
		Mechanism is supplied with cover plate Provides temperature regulation for oil, gas and electric heating installations in comfort, reduced and frost-free modes. Weekly programming Permanent display of the current programme 4 preset programmes, 1 free programme, 4 time periods max. per day, 2 adjustable temperature levels. Manual switching possible Adjustment range: 7°C to 30°C Adjustment accuracy: ± 0.5°C Permanent backup of programmes Working reserve 100 hrs 1 output per changeover contact Breaking capacity: 8 A max Complete with a 5-module cover Supplied with with Cat.No 0 801 02 Batibox multimaterial 2-gang box (depth 40 mm)	
1	7 521 35		<input type="checkbox"/> White Valena Life
1	7 522 35		<input type="checkbox"/> Ivory Valena Life
1	7 523 35		<input type="checkbox"/> Aluminium Valena Life
		Ventilation control	
		Ventilation control switch (0, 1, 2, 3)	
		Mechanism is supplied with cover plate Screw terminals AC 23 A 2,5 kW, AC 21 A 20 A	
1	7 521 32		<input type="checkbox"/> White Valena Life
1	7 522 32		<input type="checkbox"/> Ivory Valena Life
1	7 523 32		<input type="checkbox"/> Aluminium Valena Life

Valena™ Life

audio sockets and USB chargers with cover plate



7 533 20 + 7 541 31



7 531 20 + 7 540 71



7 531 29 + 7 540 01

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates. IP 2X protection. Supplied with mounted dust protection transparent shield. Flowpack packaging: robust protection to ensure optimum operation

Pack	Cat. Nos	German standard socket outlets 16 A - 250 V~
15	7 531 20	2P+E socket with shutters Automatic terminals
15	7 532 20	White Valena Life
15	7 533 20	Ivory Valena Life
		Aluminium Valena Life
		2P+E socket with shutters for refurbishments Special tap-off screw and 6 mm ² terminals, big capacity for cables 1x6 mm ² or 2x4 mm ² or 3x2.5 mm ² . To be used in refurbishments with 30 mm depth boxes.
5	7 531 28	White Valena Life
5	7 532 28	Ivory Valena Life
5	7 533 28	Aluminium Valena Life
		2P+E socket with shutters, red Supplied with cover plate Automatic terminals
5	7 531 29	Valena Life design
		2P+E socket with shutters, red, tamperproof Supplied with cover plate. Automatic terminals. Possible accessory: tamperproof insert Cat. No. 0 502 99 - fits directly into the plug
5	7 531 31	Valena Life design
		2P+E socket with shutters, orange Supplied with cover plate Automatic terminals
1	7 532 29	Valena Life design
		2P+E socket with shutters, green Supplied with cover plate Automatic terminals
1	7 533 29	Valena Life design

Valena™ Life

socket outlets with cover plate

2016



7 531 26 + 7 542 21



7 531 26 + 7 542 21

Pack	Cat. Nos	German standard double socket outlets 16 A - 250 V~
		Automatic terminals
		2x2P+E socket with shutters
5	7 531 26	White Valena Life
5	7 532 26	Ivory Valena Life
5	7 533 26	Aluminium Valena Life
		2x2P+E socket
5	7 531 27	White Valena Life
5	7 532 27	Ivory Valena Life
5	7 533 27	Aluminium Valena Life
		2x2P+E socket plate adaptor To be used for creating multigang installations of single functions with double sockets (for example RJ 45 sockets, TV sockets, etc)
5	7 542 25	White Valena Life
5	7 542 35	Ivory Valena Life
5	7 542 45	Aluminium Valena Life
		2P+E/USB mixed socket In renovation, allows a traditional socket to be replaced without changing the wiring. To be installed in minimum 40 mm depth "regular" flush mounting box 2P+E 16 A + USB 1500 mA Conforms to standard IEC 62684-2011-01 For charging mobile phones, tablet PCs, smartphones, MP3 and MP4 players quickly. Frees up a socket recess. Consumption in passive mode < 0.1 W class II SELV Conforms to the EEC directive on harmonisation of the charging standard for portable terminals and the harmonisation of mobile phone chargers Supplied cordless. Complete product with cover plate and plate.
1	7 531 10	White Valena Life
1	7 532 10	Ivory Valena Life



7 533 52 + 7 541 31



7 533 51 + 7 541 31



7 531 61 + 7 540 01



7 531 64 + 7 540 81



7 532 64 + 7 541 81

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Star architecture TV sockets
		Star cabling (1 socket = 1 cable to antenna) ensures a HD quality level of distribution of TV standard For distribution of TV & Radio signals All operators (DVB-T, satellite, Cablecast) Meet EN 50083-4 and CEM 50083-2 European Directive. HDTV compatible: Low fading (<1.5 dB) LTE ready, shielded socket to protect against interference from mobile phone network 3G & 4G signals TV male connector (Ø 9.5 mm) R female connector (Ø 9.5 mm) SAT "F" type connector Recommended coaxial cable: 17/19 VATC Visual check of the connection
		TV-R-SAT sockets TV: 0-862 MHz R: 87.5 - 108 MHz SAT: 950-2400 MHz
5	7 531 52	<input type="checkbox"/> White Valena Life
5	7 532 52	<input type="checkbox"/> Ivory Valena Life
5	7 533 52	<input type="checkbox"/> Aluminium Valena Life
		Male TV socket TV: 0-2400 MHz
5	7 531 51	<input type="checkbox"/> White Valena Life
5	7 532 51	<input type="checkbox"/> Ivory Valena Life
5	7 533 51	<input type="checkbox"/> Aluminium Valena Life

Pack	Cat. Nos	Passthrough TV sockets - 10 dB
		Installation in case of maintenance An amplifier and line balancing are recommended TV male connector (Ø 9.5 mm) R female connector (Ø 9.5 mm) SAT "F" type connector. Recommended coaxial cable: 17/19 VATC. visual check of the connection
		TV-R-SAT socket TV: 5-68/120-862 MHz R: 87.5 - 108 MHz SAT: 950-2400 MHz
5	7 531 65	<input type="checkbox"/> White Valena Life
5	7 532 65	<input type="checkbox"/> Ivory Valena Life
5	7 533 65	<input type="checkbox"/> Aluminium Valena Life
		Male TV socket TV: 0-862 MHz
5	7 531 61	<input type="checkbox"/> White Valena Life
5	7 532 61	<input type="checkbox"/> Ivory Valena Life
5	7 533 61	<input type="checkbox"/> Aluminium Valena Life
		Terminal TV sockets Installation in case of maintenance An amplifier and line balancing are recommended TV male connector (Ø 9.5 mm) R female connector (Ø 9.5 mm) SAT "F" type connector Recommended coaxial cable: 17/19 VATC. visual check of the connection 1 input with 1 resistance cap socket -10 dB
		TV-R-SAT socket TV: 5-68/120-862 MHz R: 87.5 - 108 MHz SAT: 950-2400 MHz
5	7 531 64	<input type="checkbox"/> White Valena Life
5	7 532 64	<input type="checkbox"/> Ivory Valena Life
5	7 533 64	<input type="checkbox"/> Aluminium Valena Life
		Male TV socket TV: 0-862 MHz
5	7 531 60	<input type="checkbox"/> White Valena Life
5	7 532 60	<input type="checkbox"/> Ivory Valena Life
5	7 533 60	<input type="checkbox"/> Aluminium Valena Life

Valena™ Life

data and telephone sockets with cover plate

2016



7 533 48 + 7 541 31



7 531 43 + 7 540 71



7 532 39 + 7 540 41

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.
Supplied with mounted dust protection transparent shield.
Flowpack packaging: robust protection to ensure optimum operation.

Pack	Cat. Nos	Data sockets Cat. 6 A
		With LCS ² connector with fast connection thanks to integrated crimping Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables Contacts marked with dual colour code and wiring schemes 568 A and 568 B Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568 C2
		RJ 45 socket Cat. 6 A STP
5	7 531 48	<input type="checkbox"/> White Valena Life
5	7 532 48	<input type="checkbox"/> Ivory Valena Life
5	7 533 48	<input type="checkbox"/> Aluminium Valena Life
		Double RJ45 socket Cat. 6 A STP
5	7 531 49	<input type="checkbox"/> White Valena Life
5	7 532 49	<input type="checkbox"/> Ivory Valena Life
5	7 533 49	<input type="checkbox"/> Aluminium Valena Life

		Data sockets Cat. 6
		With LCS ² connector with fast connection thanks to integrated crimping Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables Contacts marked with dual colour code and wiring schemes 568 A and 568 B Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568 C2
		RJ 45 socket Cat. 6 UTP
5	7 531 42	<input type="checkbox"/> White Valena Life
5	7 532 42	<input type="checkbox"/> Ivory Valena Life
5	7 533 42	<input type="checkbox"/> Aluminium Valena Life
		RJ 45 socket Cat. 6 STP
5	7 531 46	<input type="checkbox"/> White Valena Life
5	7 532 46	<input type="checkbox"/> Ivory Valena Life
5	7 533 46	<input type="checkbox"/> Aluminium Valena Life
		Double RJ 45 socket Cat. 6 UTP
5	7 531 43	<input type="checkbox"/> White Valena Life
5	7 532 43	<input type="checkbox"/> Ivory Valena Life
5	7 533 43	<input type="checkbox"/> Aluminium Valena Life
		Double RJ 45 socket Cat. 6 STP
5	7 531 47	<input type="checkbox"/> White Valena Life
5	7 532 47	<input type="checkbox"/> Ivory Valena Life
5	7 533 47	<input type="checkbox"/> Aluminium Valena Life

Pack	Cat. Nos	Data sockets Cat. 5e
		With LCS ² connector with fast connection thanks to integrated crimping Take AWG 22 single-core cables up to AWG 26 and AWG multicore cables Contacts marked with dual colour code and wiring schemes 568 A and 568 B Conform to standards ISO/IEC 11801 Ed. 2.0, amendment 2, EN 50173-1 and TIA/EIA 568 C2
		RJ 45 socket Cat. 5e UTP
5	7 531 40	<input type="checkbox"/> White Valena Life
5	7 532 40	<input type="checkbox"/> Ivory Valena Life
5	7 533 40	<input type="checkbox"/> Aluminium Valena Life
		RJ 45 socket Cat. 5e FTP
5	7 531 53	<input type="checkbox"/> White Valena Life
5	7 532 53	<input type="checkbox"/> Ivory Valena Life
5	7 533 53	<input type="checkbox"/> Aluminium Valena Life
		Double RJ45 socket Cat. 5e UTP
5	7 531 41	<input type="checkbox"/> White Valena Life
5	7 532 41	<input type="checkbox"/> Ivory Valena Life
5	7 533 41	<input type="checkbox"/> Aluminium Valena Life
		Double RJ45 socket Cat. 5e FTP
5	7 531 54	<input type="checkbox"/> White Valena Life
5	7 532 54	<input type="checkbox"/> Ivory Valena Life
5	7 533 54	<input type="checkbox"/> Aluminium Valena Life

		Telephone sockets
		Equipped with a modular Jack connector with 1/4 turn terminal for fast connection. Tap-off possible
		RJ 11 socket
5	7 531 38	<input type="checkbox"/> White Valena Life
5	7 532 38	<input type="checkbox"/> Ivory Valena Life
5	7 533 38	<input type="checkbox"/> Aluminium Valena Life
		Double RJ 11 socket
5	7 531 39	<input type="checkbox"/> White Valena Life
5	7 532 39	<input type="checkbox"/> Ivory Valena Life
5	7 533 39	<input type="checkbox"/> Aluminium Valena Life

Valena™ IN'MATIC mechanisms

USB chargers



7 531 12 + 7 540 71



7 521 74 + 7 540 91



7 520 69 + 7 541 21

Valena In'Matic mechanisms are supplied with metal support, for claw or screw mounting. IP 2X protection. Supplied with mounted dust protection transparent shield. Packaged in boxes.

Pack	Cat. Nos	USB chargers
		Double USB power supply 100-240 V~ 50-60 Hz, 5 V - 1500 mA Conforms to standard IEC 62684-2011-01 For charging mobile phones, tablet PCs, smartphones, MP3 and MP4 players quickly. Frees up a socket recess. Consumption in passive mode < 0,1 W class II SELV Conforms to the EEC directive on harmonisation of the charging standard for portable terminals and the harmonisation of mobile phone chargers. For installation in flush-mounting box depth 40 mm minimum. Supplied cordless. Complete product with cover plate and plate.
5	7 531 12	<input type="checkbox"/> White Valena Life
5	7 532 12	<input type="checkbox"/> Ivory Valena Life
5	7 533 12	<input type="checkbox"/> Aluminium Valena Life
		Micro USB charging dock Mechanism is supplied with cover plate 100-240 V~ 50-60 Hz, 5 V - 1500 mA Cradle for charging a smartphone or tablet. Screen remains visible during charging. To be installed in minimum 40 mm depth flush mounting box. Conforms to standard IEC 62684-2011-01 For charging mobile phones, tablets, smartphones, MP3 and MP4 players quickly Standby consumption less than 0.01 W class II SELV Conforms to the EC directive on harmonisation of the charging standard for portable terminals and the harmonisation of mobile phone chargers. - smartphone holder with non-slip coating (fix using screws or adhesive on all surfaces)
1	7 530 11	<input type="checkbox"/> White Valena Life
1	7 530 12	<input type="checkbox"/> Ivory Valena Life
		Skirting light with motion detector Screw terminals When someone passes it, the mechanism detects movement and lights the passage. Detection field 180°. Detection range 6 m LED lighting. The function has a disengageable audible signal.
1	7 521 74	<input type="checkbox"/> White Valena Life
1	7 522 74	<input type="checkbox"/> Ivory Valena Life
1	7 523 74	<input type="checkbox"/> Aluminium Valena Life
		Extractible emergency lamp The lamp automatically turns on in case of power failure. Push&pull system to extract the lamp from the charging base: this turns on the lamp which can then be used as a torch (ON-OFF). Working reserve: 2 hours
1	7 520 69	<input type="checkbox"/> White Valena Life
1	7 521 69	<input type="checkbox"/> Ivory Valena Life
1	7 522 69	<input type="checkbox"/> Aluminium Valena Life

Valena™ IN'MATIC mechanisms

audio sockets with cover plate

2016



7 531 78 + 7 540 31



7 531 72 + 7 540 81



7 531 72 + 7 540 81

Valena In'Matic mechanisms supplied with cover plates and support frames. To be equipped with plates.

Supplied with mounted dust protection transparent shield.

Flowpack packaging: robust protection to ensure optimum operation

Pack	Cat. Nos	Loudspeaker sockets
		4 mm ² terminals Loudspeaker socket <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life Double loudspeaker socket <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
5	7 531 72	
5	7 532 72	
5	7 533 72	
5	7 531 78	
5	7 532 78	
5	7 533 78	
		Audio and video sockets HDMI type A sockets Mechanism is supplied with cover plate Used to transmit high-definition digital audio/video streams between a source (computer, HD-DVD drive) and a compatible receiver (TV, video projector) Screw-type sockets HDMI 1.3 <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
1	7 531 71	
1	7 532 71	
1	7 533 71	
		HD 15 + 3.5 mm Jack socket Mechanism is supplied with cover plate Used to transmit analogue audio/video streams between a source (computer) and a compatible receiver (TV, video projector). Video resolution VGA - UXGA HD 15 female socket + 3.5 mm jack socket (screwed)
1	7 531 70	
1	7 532 70	
1	7 533 70	
		Triple RCA socket For the composite video and stereo audio connection of any amplifier, DVD drive, VCR type peripheral. Rocker 7 547 20 (white) 21 (ivory) and 22 (aluminium) is not included
1	7 530 75	
		Accessories Cable outlet with terminals With 5 terminals to take 2.5 mm ² cables Maximum cable diameter: 12 mm With cable grip <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
5	7 531 33	
5	7 532 33	
5	7 533 33	
		Cable outlet without terminals Maximum cable diameter: 12 mm With cable grip <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
5	7 531 34	
5	7 532 34	
5	7 533 34	

Valena™ IN'MATIC mechanisms

sound diffusion and loudspeakers






7 521 42 + 7 540 06








7 520 36 + 7 554 30
+ 7 540 81



Valena In'Matic mechanisms are with metal support, claw or screw mounting
To be equipped with cover plates and plates of Valena Life
Supplied with mounted dust protection transparent shield. Packaged in boxes

Pack	Cat.Nos	Sound diffusion
		LCD RDS tuner with power supply
		Mechanism is supplied with cover plate Built-in 230 V power supply. Manual or automatic station selection (RDS search). Stores 10 stations. Built-in aerial. Volume, balance and bass/treble control. Has an auxiliary input (3.5 mm Ø jack) for connecting an MP3 player (lead not supplied). Compatible with 4/8 or 16 Ω loudspeakers except for Cat.No 0 673 30. Stereo or mono output. Output power 2 x 3 W. Station display, creation of 2 lists of favourites (2 x 8 presets). Alarm function (possible to set 2 different times). Loudspeaker selection (left or right) for each of the alarms. Timer function. On/off control (manual/automatic), presence of mains supply. To be fitted with a 5-module plate. Supplied with Cat.No 0 801 02 Batibox multimaterial 2-gang box (depth 40 mm).
1	7 521 42	 <input type="checkbox"/> White Valena Life
1	7 522 42	 <input type="checkbox"/> Ivory Valena Life
1	7 523 42	 <input type="checkbox"/> Aluminium Valena Life

Pack	Cat.Nos	Sound diffusion (continued)
1	7 520 36	Bluetooth module
		 15 V power supply. Has an auxiliary input (3.5 mm Ø jack) for connecting an MP3 player without Bluetooth (lead not supplied). Used to receive a musical source from a smartphone or any other Bluetooth peripheral via Bluetooth or a jack input and play it via a wired connection on a 4/8 or 16 loudspeaker. Stereo or mono output. Rocker 7 554 30 (white), 31 (ivory) and 32 (Aluminium) is not included
1	0 673 22	Power supply in false ceiling for Bluetooth module
		 Power supply 230 V~ Output 15 V= - 3.5 W For use in Plexo box Cat.No 0 920 52
		Loudspeakers
		To connect with local control Cat.No 7 520 37 and LCD RDS tuners
1	0 673 27	For false ceiling
		 White Depth 27 mm Hole diameter: 65 mm Visible depth: 11 mm Power: 2 W - 16 Ω - 2"
	L4566/10	 Equipped with clips for attachment Use a 65 mm Ø crown saw to cut the hole 8 Ω false ceiling and plasterboard loudspeaker L = 100 mm - power 20 W - colour white
1	0 673 30	False ceiling mounting invisible loudspeaker
		 For multi-zone sound distribution Can be connected with the 15 V - 60 W power supply supplied with source input Max. power 8 W Depth: 98 mm Supplied with adhesive and gluing template



7 521 61 + 7 540 71



7 521 59 + 7 540 81



7 531 19 + 7 540 01



7 521 77 + 7 540 01



7 540 21

Valena In'Matic mechanisms supplied with white cover plates, weatherproof membrane and support frames.
To be equipped with plates. Supplied with mounted dust protection transparent shield.
Flowpack packaging: robust protection to ensure optimum operation








Pack	Cat. Nos	Switches 10 AX - 250 V~, IP44
5	7 521 51	One-way switch Automatic terminals <input type="checkbox"/> White Valena Life
5	7 521 56	Two-way switch Automatic terminals <input type="checkbox"/> White Valena Life
5	7 521 61	Illuminated one-way switch Automatic terminals Equipped with 0.15 mA low consumption LED <input type="checkbox"/> White Valena Life
5	7 521 67	Illuminated two-way switch Automatic terminals Equipped with 0.15 mA low consumption LED <input type="checkbox"/> White Valena Life
5	7 521 55	2-gang one-way switch Automatic terminals <input type="checkbox"/> White Valena Life
5	7 521 58	2-gang two-way switch Automatic terminals <input type="checkbox"/> White Valena Life
1	7 521 59	Illuminated 2-gang two-way switch Automatic terminals Equipped with 2 PCS 2 x 0.15 mA low consumption LED <input type="checkbox"/> White Valena Life
5	7 521 64	Switches 16 AX - 250 V~, IP44 Double pole switch Screw terminals <input type="checkbox"/> White Valena Life

Pack	Cat. Nos	Push-buttons 6 A - 250 V~, IP44
5	7 521 71	Changeover push-button Automatic terminals <input type="checkbox"/> White Valena Life
5	7 521 75	Changeover push-button, bell symbol Automatic terminals <input type="checkbox"/> White Valena Life
6	7 521 76	Illuminated changeover push-button, bell symbol Automatic terminals Equipped with 0.15 mA low consumption LED <input type="checkbox"/> White Valena Life
5	7 531 19	German standard socket outlets 16 A - 250 V~, IP44 2P+E socket with shutters, with flap Automatic terminals <input type="checkbox"/> White Valena Life
1	7 521 77	Motion sensor 250 W IP 44 <input type="checkbox"/> White Valena Life Accepted power by lamp type: - LEDs* 3 W to 100 W - Compact fluorescent* 3 W to 100 W - LEDs, CFLs, Halogen, fluorescent tubes with ferromagnetic or electronic ballast: 3 VA to 250 VA - 230 V halogen, incandescent: 3 W to 250 W *if several sensors are installed on the same circuit, the minimum load increases (see data sheet). Up to 3 sensors can be connected in parallel. Time delay setting from 10 s to 10 min. Light level threshold setting from 5 lux to 1275 lux. Standby consumption: 0.02 W
1	7 540 21	IP 44 plate with flap Compatible with all Valena In'Matic mechanisms IP44/IK07 UV-resistant

Valena™ INMATIC mechanisms

accessories



Pack	Cat. Nos	Accessories
10	7 541 91	Surface-mounting box 1-gang Sizes: 89x89x44.8 mm  <ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
10	7 542 01	
10	7 542 11	
5	7 541 92	Surface-mounting box 2-gang Sizes: 160x89x44.8 mm  <ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
5	7 542 02	
5	7 542 12	
1	7 521 45	Support frame 4x2 modules with plate Takes Mosaic™ Programme functions compatible with Batibox open boxes 40 mm depth (Cat. No. 0 801 03), 50 mm depth (Cat. No. 080123)  <ul style="list-style-type: none"> White Valena Life Aluminium Valena Life
1	7 523 45	
1	7 521 46	Support frame 2x4x2 modules with plate Takes Mosaic™ Programme functions compatibles with Batibox open boxes, Cat. No. 0 801 26  <ul style="list-style-type: none"> White Valena Life Aluminium Valena Life
1	7 523 46	
1	7 551 80	Blanking plate With metal support for claw or screw mounting. Supplied with mounted dust protection transparent shield. IP 20: against direct contact when the full capacity of the support is not used  <ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
1	7 551 81	
1	7 551 82	
5	7 521 43	Adaptor for 50X50 mm mechanisms DIN 49075 Is used to adapt specific functions with 50x50 cover plate  <ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
1	7 522 43	
1	7 523 43	
1	7 521 44	Adaptor for Mosaic™ mechanisms Accept 2-module mechanisms from the Mosaic™ or Arteor ranges, except special surface mounting type  <ul style="list-style-type: none"> White Valena Life Aluminium Valena Life
1	7 523 44	








Valena™ INMATIC mechanisms

LED lamps

2016



All lamps in Valena Life range devices have low consumption LED technology. After clipping in the rocker, all lamps light up blue.

Pack	Cat. Nos	LED lamps for illuminated functions
10	0 676 84	Plug-in LED lamp for illuminated one-way switch and push-button  230 V~ - Consumption 0.15 mA
10	0 676 86	Plug-in LED lamp for illuminated two-way switch  230 V~ - Consumption 0.15 mA
10	6 650 90	LED lamp to be wired for illuminated intermediate switch  230 V~ - Consumption 0.15 mA
10	0 676 87	Plug-in LED lamp for 12-48 V illuminated push-buttons  12-24-48 V
10	0 676 88	Plug-in LED lamp for two-way switch with indicator and neutral terminal  230 V~ - Consumption 3 mA
10	6 650 91	LED lamp to be wired for indicator functions  230 V~ - Consumption 3 mA
10	0 676 64	LED lamp to be wired for indicator socket  230 V~ - Consumption 3 mA

Valena™ Life - radio control mechanisms

radio receivers for lighting and roller blinds



0 672 34



0 672 63

Receivers to be equipped with Valena Life cover plates and with 2-module plates. To be installed in flush-mounting boxes min. depth 40 mm. To be equipped with 2-module support frames Cat.No 7 520 44. Connect to the load and can be controlled by remote control transmitters, scenario switches, mobile control units and detectors. Packaged in boxes

Pack	Cat.Nos.	Switches
1	0 672 33	Switch with neutral - 2500 W
1	0 672 34	Double switch with neutral - 2 x 1000 W
1	0 672 21	Switch without neutral - all loads To control all loads, including energy saving loads (LED, Compact fluorescent) LED: 5 W-60 W Halogen and incandescent: 7 W -300 W
1	0 672 27	Dimmer All loads dimmer without neutral To control dimmable loads including dimmable LED and Compact fluorescent lamps LED dimmable: 5 W-60 W Halogen and incandescent: 7 W-300 W
1	0 672 63	Roller blinds radio switch 500 VA To control one motor
5	7 520 44	In'matic support for radio and MyHOME mechanisms Accept 2 modules mechanism
1	5 738 62	Receiver control units for false ceiling - 100-240 V~ Its receiver function is used to execute, on its circuits, ON/OFF commands received from centralised control units, scenario switches, mobile control units, etc Universal switch - phase/neutral 1 output - 2500 W
1	5 738 64	Dimmer (excluding fluorescent and LEDs) - without neutral 1 output - 600 W
1	5 738 66	Dimmer for 1-10 V ballast - phase/neutral 1 output - 500 VA

Valena™ Life - radio control mechanisms

cover plates offer




7 547 70 + 7 540 01




7 547 29 + 7 541 31

Pack	Cat.Nos.	Cover plates for radio controls
1	7 547 09	Cover plates for switches and dimmer
1	7 547 13	Lighting switch 1 circuit
1	7 547 02	<ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
1	7 547 70	Lighting switch 2 circuits
1	7 547 71	<ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
1	7 547 72	Lighting dimmer
1	7 547 40	Marking: + top right - bottom right
1	7 547 41	<ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life
1	7 547 42	Roller blind switch
1	7 547 24	Marking: square bottom left
1	7 547 28	up arrow top right
1	7 547 29	down arrow bottom right
1	7 547 24	<ul style="list-style-type: none"> White Valena Life Ivory Valena Life Aluminium Valena Life

Four pieces required for a complete product



Support frame



Mechanism



Cover plate



Plate

Valena™ Life - radio control mechanisms

lighting, roller blind and scenario wireless controls



5 738 70



0 883 07



0 882 32

Wireless controllers to be equipped with Valena Life cover plates and with 2-module plates. Can be fitted directly on the wall without support frame and without flush-mounting box. For remote control of a switch or group of switches. Perfect for achieving a two-way switch function without any additional wiring
Packaged in boxes

Pack	Cat.Nos	Control devices on wall - Lithium battery supplied
1	7 520 82	Wireless switch radio control for 2 circuits
1	7 520 80	Wireless dimmer switch radio control
1	7 520 81	Wireless switch radio control for 1 circuit
1	7 520 83	Wireless scenario radio control 4 push-buttons
1	7 520 84	Wireless roller blinds radio control

Radio remote control

1 scenario can control several functions: lighting level adjustment, roller blinds, general ON or OFF, etc...

Pocket scenario radio control

4-scenario controller
For radio installation
Supplied with batteries 3 V type CR2032



Radio remote control 6 scenarios

6-scenario controller
Can control a dimmer group by long press contact
Supplied with 2 batteries 1.5 V type LR03



Radio - IR remote control

5-scenario controller
Supplied with batteries



Valena™ Life - radio control mechanisms

cover plates offer



7 547 49 + 7 540 01



7 548 34 + 7 541 31



7 548 13 + 7541 31

Pack	Cat.Nos.	Cover plates for wireless control mechanisms
1	7 547 49	Wireless switch 1 circuit <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
1	7 547 59	
1	7 547 63	
1	7 547 78	Wireless switch 2 circuits <input type="checkbox"/> White Valena Life <input type="checkbox"/> Ivory Valena Life <input type="checkbox"/> Aluminium Valena Life
1	7 547 79	
1	7 547 83	
		Wireless dimmer Marking: + top right - bottom right
1	7 547 39	<input type="checkbox"/> White Valena Life
1	7 547 51	<input type="checkbox"/> Ivory Valena Life
1	7 547 53	<input type="checkbox"/> Aluminium Valena Life
		Wireless roller blind control Marking: square bottom left up arrow top right down arrow bottom right
1	7 548 24	<input type="checkbox"/> White Valena Life
1	7 548 33	<input type="checkbox"/> Ivory Valena Life
1	7 548 34	<input type="checkbox"/> Aluminium Valena Life
		Wireless scenario control 4 push buttons
1	7 548 03	<input type="checkbox"/> White Valena Life
1	7 548 04	<input type="checkbox"/> Ivory Valena Life
1	7 548 13	<input type="checkbox"/> Aluminium Valena Life

Valena™ Life - radio controls

other radio functions



Load selection charts [p. xxx](#)

Pack	Cat.Nos	Radio micromodule switch
1	0 883 06	Microswitch module receiver 300 W Connected to a load, controlled by one or more wireless controls, 3-wire installation inside the light source
		Transmitter/receiver mobile sockets Connect directly to an existing 2P+E socket to switch the light connected to the socket Its receiver function is used to execute commands received from scenario controls, centralised control units, detectors, etc. To control halogen, energy saving (LED and compact fluorescent) and incandescent lamps
1	0 883 34	Radio mobile dimmer switch-sockets ON/OFF by short press, dimming by long press German standard To control dimmable lamps
1	0 883 38	French standard To control dimmable lamps
1	0 883 33	Radio mobile switch-sockets 10 A German standard
1	0 883 37	French standard
1	0 695 03	Plexo radio transmitter/receiver switch 2500 W Its transmitter function allows it to control another lighting radio receiver switch Its receiver function is used to execute commands received from centralised control units, scenario controls, mobile control units, etc 3-wire installation in box depth 40 mm min.
1	0 883 26	Micromodule receiver for shutters Actuator device for the control of roller shutter motors with max. power 500 VA For installation in roller shutter boxes or function boxes. To be installed in roller shutter mechanisms or roller shutter control mechanisms

Support frame and plate selection charts [p. xxx-xxx](#)

Pack	Cat.Nos	Radio transmitter/receiver multifunction switches
1	0 883 39	Switches for controlling 1 or 2 circuits connected to its terminals according to 3 different operating modes: time-lag switch, switch, remote control switch. Its receiver function is used to execute, on its circuits, ON/OFF commands received from individual control units, centralised control units, scenario switches, mobile control units, etc. Phase/neutral power supply Weatherproof multifunction switch 1 circuit 2500 W or 1 NO/NC contact outputs
1	5 738 60	Weatherproof multifunction 2-gang switch 2 circuits 2500 W or 2 NO/NC contact outputs
1	0 883 09	Indoor motion sensor To switch on the lights connected to radio receivers remotely when there are movements, for an adjustable time Range detection: 2 to 10 m, timing: 1 to 30 min., light level: 1 to 1000 lux
1	0 883 30	Indoor temperature sensor IP 21. For indoor use only - surface mounting. Setting: 2 temperature thresholds. Temperature ranges: from -10°C to +40°C. Can be used to initiate 2 scenarios when the temperature is higher than the high threshold or lower than the low threshold
1	0 883 31	Transmitter with auxiliary inputs For light control Can be used to initiate ON/OFF on closing or opening of a volt-free contact. For controlling a radio installation using commercially-available detectors (eg: light-sensitive switch, moisture sensor). Fits behind a traditional switch, without damage to the walls, to control a radio switch
1	0 883 32	For scenario control Can be used to launch 2 scenarios when closing and opening with a volt-free contact. For controlling scenario radio installation using commercially available detectors (moisture sensor, wind/sun sensors or smoke detectors)
1	0 883 10	WiFi/Radio gateway To control a radio installation in or outside the home from a smartphone or a tablet Perfect for switching off a light from your office when you forgot it, to simulate that you are at home. iOS and Android apps available
1	0 883 28	Open Web Net/ZigBee Gateway Radio interface Open/ZigBee interface for centralised control of functions through devices which use the Open Web Net communication protocol

Valena™ Life - radio controls

switches and dimmers with maximum loads at 230 V (for 110 V, please halve the values given below)

Universal									
Cat.Nos	Incandescent lamp	Halogen lamp	ELV halogen with ferromagnetic transformer	ELV halogen with electronic transformer	Fluorescent tube	Compact fluorescent lamp	LED	Fluorescent lamps with 0-10 V ballast	Reducer motor for shutter
SWITCHES	0 672 21	7 - 300 W	7 - 300 W	35 - 300 VA	10 - 300 VA	-	9 - 60 W	5 - 60 W	-
	0 672 33	2500 W	2500 W	2500 VA	2500 VA	1250 VA	1250 W	1250 W	-
	0 672 34	2 x 1000 W	2 x 1000 W	2 x 1000 VA	2 x 1000 VA	2 x 500 VA	2 x 500 W	2 x 500 W	-
	0 672 63 0 883 26	-	-	-	-	-	-	-	500 VA
	0 883 34	2500 W	2500 W	2500 VA	2500 VA	1250 VA	1250 W	1250 W	-
	0 695 03	2500 W	2500 W	2500 VA	2500 VA	1250 W	1250 W	1250 W	-
	0 883 06	300 W	300 W	250 VA	250 VA	150 W	150 W	100 W	-
	0 883 39	2500 W	2500 W	2500 VA	2500 VA	1250 VA	1250 W	1250 W	yes
	5 738 60	2 x 2500 W	2 x 2500 W	2 x 2500 VA	2 x 2500 VA	2 x 1250 VA	2 x 1250 W	2 x 1250 W	yes
DIMMERS	0 672 27	7 - 300 W	7 - 300 W	35 - 300 VA dimmable transfo	10 - 300 VA dimmable transfo	-	9 - 60 W dimmable compact fluorescent	5 - 60 W dimmable LED	-
	0 883 33	7 - 300 W	7 - 300 W	35 - 300 VA dimmable transfo	10 - 300 VA dimmable transfo	-	9 - 60 W dimmable compact fluorescent	5 - 60 W dimmable LED	-




Local and remote control by Legrand APP



Mechanisms	 White  Ivory  Aluminium		
	White	Ivory	Aluminium
Switches - 250 V~			
One-way switch 10 AX	7 521 01	7 522 01	7 523 01
Double pole switch 16 AX	7 521 02	7 522 02	7 523 02
2-gang one-way switch 10 AX	7 521 05	7 522 05	7 523 05
Two-way switch 10 AX	7 521 06	7 522 06	7 523 06
Intermediate switch 10 AX	7 521 07	7 522 07	7 523 07
2-gang two-way switch 10 AX	7 521 08	7 522 08	7 523 08
Pull cord two-way switch 10 AX	7 521 23	7 522 23	7 523 23
Energy saving switch 10 AX	7 521 65	7 522 65	7 523 65
Switches with LED - 250 V~			
Illuminated one-way switch 10 AX	7 521 10	7 522 10	7 523 10
One-way switch with indicator 10 AX	7 521 04	7 522 04	7 523 04
Illuminated 2-gang one-way switch 10 AX	7 521 28	7 522 28	7 523 28
Illuminated two-way switch 10 AX	7 521 26	7 522 26	7 523 26
Illuminated intermediate switch 10 AX	7 521 48	7 522 48	7 523 48
Illuminated 2-gang two-way switch 10 AX	7 521 09	7 522 09	7 523 09
Push-buttons 10 AX - 250 V~			
Changeover push-button	7 521 11	7 522 11	7 523 11
Illuminated changeover push-button	7 521 12	7 522 12	7 523 12
Illuminated push-button 12 V	7 521 13	7 522 13	7 523 13
Illuminated label-holder push-button	7 521 14 (3 different coloured inserts)		
Changeover push-button, bell symbol	7 521 15	7 522 15	7 523 15
Illuminated changeover push-button, bell symbol	7 521 16	7 522 16	7 523 16
2-gang changeover push-button	7 521 18	7 522 18	7 523 18
Pull cord changeover push button	7 521 24	7 522 24	7 523 24
Dimmers			
Rotary dimmer without neutral	7 521 60	7 522 60	7 523 60
Push-dimmer without neutral	7 521 62	7 522 62	7 523 62
Dimmer - 1000 W (5 modules)	7 521 63	–	7 523 63
Dimmer 1 - 10V	7 520 67 + 7 548 90	7 520 67 + 7 548 91	7 520 67 + 7 548 92
Motion sensors			
Motion sensor without neutral	7 521 70	7 522 70	7 523 70
Motion sensor without neutral, with override	7 521 72	7 522 72	7 523 72
Motion sensor with neutral	7 521 73	7 522 73	7 523 73
Roller blind switch			
Roller blind switch	7 521 29	7 522 29	7 523 29
Roller blind push-button	7 521 30	7 522 30	7 523 30

Valena™ Life

mechanisms - selection charts

Mechanisms	 White	 Ivory	 Aluminium
IP44 switches - 250 V~			
One-way switch	7 521 51	—	—
Double pole switch	7 521 64	—	—
Two-way switch	7 521 56	—	—
2-gang one-way switch	7 521 55	—	—
2-gang two-way switch	7 521 58	—	—
Illuminated one-way switch	7 521 61	—	—
Illuminated two-way switch	7 521 67	—	—
Illuminated 2-gang two-way switch	7 521 59	—	—
IP44 push-buttons - 6 A - 250 V~			
Changeover push-button	7 521 71	—	—
Changeover push-button, bell symbol	7 521 75	—	—
Illuminated changeover push-button, bell symbol	7 521 76	—	—
IP44 socket outlet 16 A - 250 V~			
Motion sensor	7 531 19	—	—
IP44 motion sensor			
Motion sensor	7 521 77	—	—
IP44 plate			
IP44 plate with flap	7 540 21	—	—
Thermostats			
Electronic room thermostat	7 521 33	7 522 33	7 523 33
Floor heating thermostat	7 521 34	7 522 34	7 523 34
Programmable thermostat (5 modules)	7 521 35	7 522 35	7 523 35
Socket outlets 16 A – 250 V~			
2P+E socket outlet with shutters	7 531 20	7 532 20	7 533 20
2P+E socket outlet for refurbishment (Screw 6 mm ² terminals)	7 531 28	7 532 28	7 533 28
2P+E socket with shutters, red,	7 531 29		
2P+E socket with shutters, red, tamperproof	7 531 31		
2P+E socket with shutters, green	7 533 29		
2P+E socket with shutters, orange	7 532 29		
2x2P+E socket outlet with shutters	7 531 26	7 532 26	7 533 26
2x2P+E socket outlet without shutters	7 531 27	7 532 27	7 533 27
TV sockets			
Male TV socket - star (1,5 dB)	7 531 51	7 532 51	7 533 51
Male TV socket - terminal (10 dB)	7 531 60	7 532 60	7 533 60
TV socket - passthrough (14 dB)	7 531 61	7 532 61	7 533 61
TV-R-SAT socket - star (1,5 dB)	7 531 52	7 532 52	7 533 52
TV-R-SAT socket - terminal (10 dB)	7 531 64	7 532 64	7 533 64
TV-R-SAT socket - passthrough (14 dB)	7 531 65	7 532 65	7 533 65

Mechanisms	 White  Ivory  Aluminium		
RJ45 sockets			
1xRJ45 Cat. 5e UTP	7 531 40	7 532 40	7 533 40
2xRJ45 Cat. 5e UTP	7 531 41	7 532 41	7 533 41
1xRJ45 Cat. 5e FTP	7 531 53	7 532 53	7 533 53
2xRJ45 Cat. 5e FTP	7 531 54	7 532 54	7 533 54
1xRJ45 Cat. 6 UTP	7 531 42	7 532 42	7 533 42
2xRJ45 Cat. 6 UTP	7 531 43	7 532 43	7 533 43
1xRJ45 Cat. 6 STP	7 531 46	7 532 46	7 533 46
RJ45 sockets			
2xRJ45 Cat. 6 STP	7 531 47	7 532 47	7 533 47
1xRJ45 Cat. 6A STP	7 531 48	7 532 48	7 533 48
2xRJ45 Cat. 6A STP	7 531 49	7 532 49	7 533 49
Telephone sockets			
1xRJ11	7 531 38	7 532 38	7 533 38
2xRJ11	7 531 39	7 532 39	7 533 39
USB chargers			
Double USB power supply - 5 V - 1500 mA	7 531 12	7 532 12	7 533 12
Micro USB charging dock - 5 V - 1500 mA	7 530 11	7 530 12	–
2P+E/USB mixed socket	7 531 10	7 532 10	–
Other functions			
Electronic key card switch	7 520 25 + 7 551 60	7 520 25 + 7 551 61	7 520 25 + 7 551 62
Blanking plate	7 551 80	7 551 81	7 551 82
Cable outlet with terminals	7 531 33	7 532 33	7 533 33
Cable outlet without terminals	7 531 34	7 532 34	7 533 34
Ventilation control (1-2-3)	7 521 32	7 522 32	7 523 32
Skirting light with motion detector	7 521 74	7 522 74	7 523 74
Extractible emergency lamp	7 520 69	7 521 69	7 522 69
Audio sockets			
Loudspeaker socket	7 531 72	7 532 72	7 533 72
Double loudspeaker socket	7 531 78	7 532 78	7 533 78
HD15 + 3.5 mm Jack	7 531 70	7 532 70	7 533 70
HDMI 1.3	7 531 71	7 532 71	7 533 71

Valena™ Life

plates selection chart

2016

The same Cat. No. of plates can be mounted in horizontal or vertical position.

VALENA LIFE									
PLATES		1 GANG	2 GANG	3 GANG	4 GANG	5 GANG	5 module open plate	Specific 2x2P+E (double socket outlet)	
								single plate*	double plate*
White		7 540 01	7 540 02	7 540 03	7 540 04	7 540 05	7 540 06	7 542 21	7 542 22
White with labelholder (horizontal)		7 540 11	7 540 12	7 540 13					
White IP 44 with flap		7 540 21							
White/chrome		7 540 31	7 540 32	7 540 33	7 540 34	7 540 35			
Ivory		7 540 41	7 540 42	7 540 43	7 540 44	7 540 45	7 540 46	7 542 31	7 542 32
Ivory with labelholder (horizontal)		7 540 51	7 540 52	7 540 53					
Ivory/gold		7 540 61	7 540 62	7 540 63	7 540 64	7 540 65			
Terracotta		7 540 71	7 540 72	7 540 73	7 540 74	7 540 75			
Lime		7 540 81	7 540 82	7 540 83	7 540 84	7 540 85			
Adria		7 540 91	7 540 92	7 540 93	7 540 94	7 540 95			
Royal white		7 541 01	7 541 02	7 541 03	7 541 04	7 541 05			
Royal ivory		7 541 11	7 541 12	7 541 13	7 541 14	7 541 15			
Link		7 541 21	7 541 22	7 541 23	7 541 24	7 541 25			
Aluminium		7 541 31	7 541 32	7 541 33	7 541 34	7 541 35	7 541 36	7 542 41	7 542 42
Pearl		7 541 41	7 541 42	7 541 43	7 541 44	7 541 45			
Inox style		7 541 51	7 541 52	7 541 53	7 541 54	7 541 55			
Copper style		7 541 61	7 541 62	7 541 63	7 541 64	7 541 65			
Dark wood		7 541 71	7 541 72	7 541 73	7 541 74	7 541 75			
Light wood		7 541 81	7 541 82	7 541 83	7 541 84	7 541 85			
SURFACE-MOUNTING BOXES									
Surface-mounting box white		7 541 91	7 541 92						
Surface-mounting box ivory		7 542 01	7 542 02						
Surface-mounting box aluminium		7 542 11	7 542 12						



FOLLOW US ALSO ON



www.legrand.com



www.youtube.com/user/legrand



www.facebook.com/Legrand



twitter.com/legrand_news



pinterest.com/legrandgroup



World Headquarters

and International Department
87045 Limoges Cedex - France

☎ : + 33 (0) 5 55 06 87 87

Fax: + 33 (0) 5 55 06 74 55